

AST Every MissionLINK 700

How to insert and remove the Sim cards

1. Open the lid of the Case




2. Remove the 2 batteries of the system



3. Unscrew the 20 Screws holding the plate to the case




4. Remove the cable of the antenna from the bottom of the plate

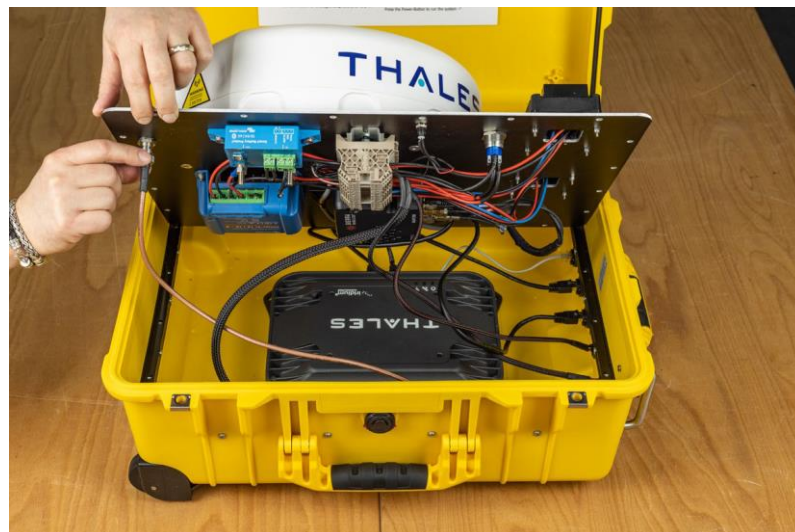


5. Insert the Certus Sim card to the Thales MissionLINK




6. Remove the Sim card cover of the LX 60

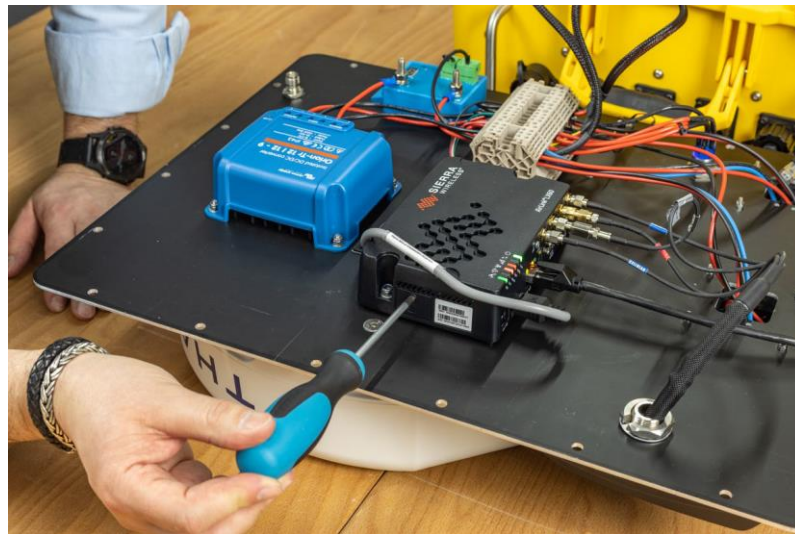


7. Insert the GSM Sim card into the LX60

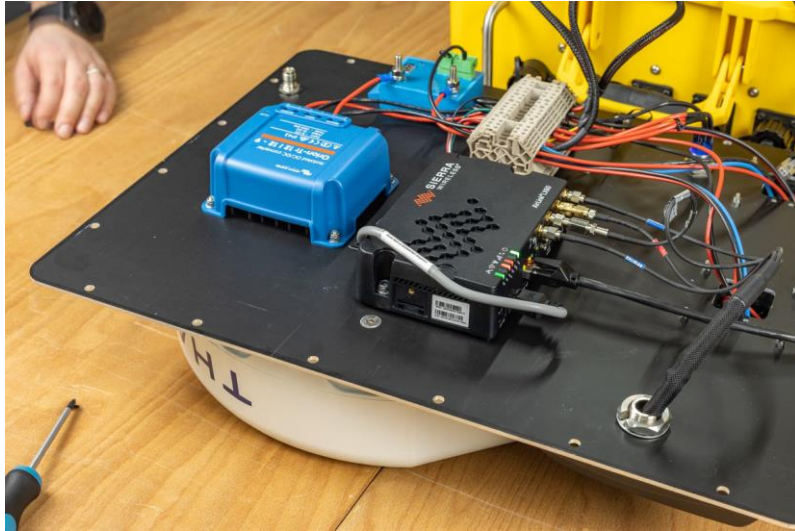

8. Put the Sim card cover back onto the LX60

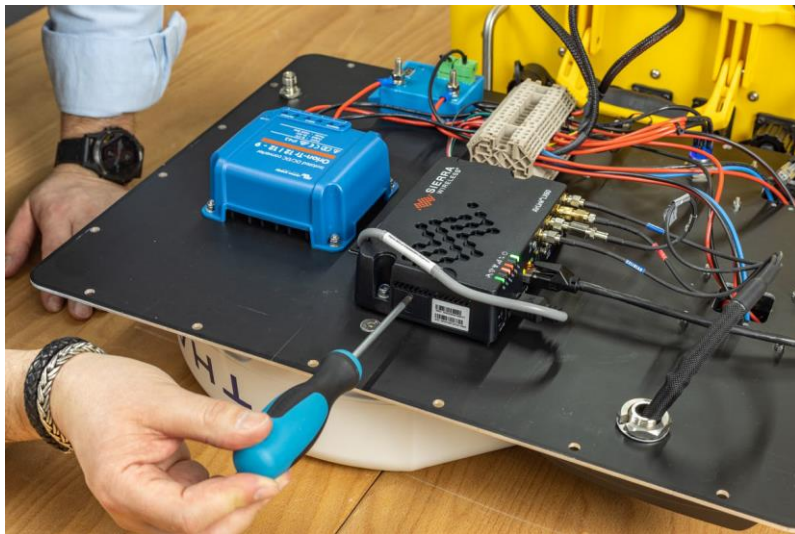

9. Reconnect the antenna cable to the backside of the plate

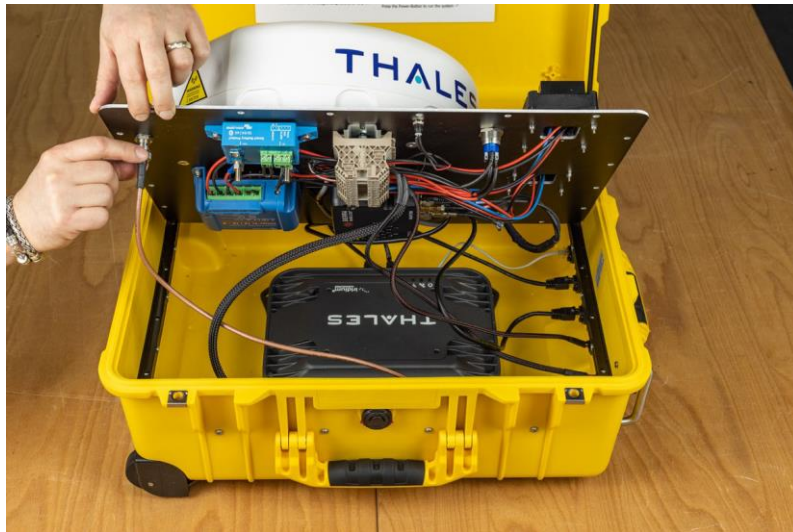

Note: The LAN Ports of the LTE Router LX60
are connected as follows:

LX 60 LAN Port 1 – External Connector LAN Port 1

LX 60 LAN Port 2 – MissionLINK Terminal LAN Port 1

10. Screw the 20 screws back into the case



11. Plug the 2 Batteries back into the case



The AST EVERY Mission Link 700 is now ready to use.